



W-5600CPRII

In-line automatic wrapping system

DIGI's solution for in-line wrapping operations
that fit anywhere

W-5600CPRII -ACCUM




Searching for a New Balance

The W-5600CPR11 remarkably improves the efficiency of your wrapping operation with speeds up to 30 packages/min.



Tray presser with enhanced heater conveyor for secure sealing

W-5600CPR11 -ACCUM with optional gravity outfeed roller

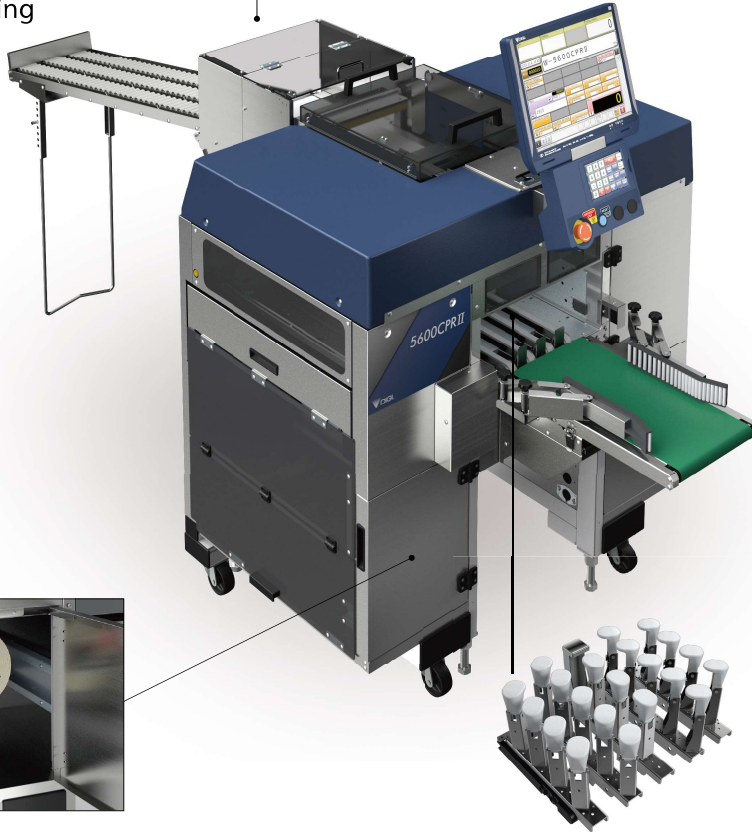

•Gravity infeed roller



•Gravity outfeed roller



Quick, simple film loading using the new mechanism

Easy to access inside and underneath the machine for daily cleaning

Specifications

Wrapping

Package size Width: 130-350mm (5.1-13.8 inches)
 Height: 10-150 mm (0.4-5.9 inches)
 Depth: 80-230mm (3.1-9.0 inches)
 The combination of maximum size of each dimension cannot be used. The size of the package that can be wrapped also depends on the film used.

Wrapping speed Max. 30 packages/min.
 Wrapping capacity 5kg (11 lb)
 Number of film roll One roll
 Film width 300-500mm (11.8-19.7 inches)
 Film length Max. 1,500m

Operation console

Display panel TFT LCD color (15 inches) touch panel
 Operation keys Mechanical keys and touch screen
 Memory for programmable files --- 18GB

General

Power source and • 208-240V; 1Ø/3Ø; 60Hz; 2.2kVA, 2.0kW
 power consumption • 220-240V; 1Ø; 50/60Hz; 2.2kVA, 2.0kW
 Net weight Approx. 340kg
 Dimensions 1060(W) x 1577(D) x 1532(H) mm
 41.7(W) x 62.1(D) x 60.3(H) inches

Model Variation

W-5600CPR11 (with gravity infeed roller)
 W-5600CPR11 -ACCUM
 W-5600CPR11 -IC



*Specifications are subject to change without prior notice.

TERAOKA SEIKO Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
 Tokyo 146-8580 JAPAN
 www.digisystem.com

